

## FC PC Attenuator Specification

### Product Description

The Plug Type Fixed Attenuator family offers high performance of variously fixed attenuation for industrial standard connections. Wide attenuation range, extremely low return loss, polarization insensitive and excellent repeatability. With our highly integrated design and manufacture capability. The attenuator complies with industry green initiative such as ROHS.

### Features

- Wide Attenuation Range
- Low Return Loss
- Low PDL
- Polarization Insensitive
- Various connector type
- Highly Reliable

### Applications


- Optical Telecommunication Network
- CATV Network
- Testing Deice Accessory

### Parameters

Parameters		Min.	Typical	Max	Unit
Operating Wavelength Range		1310 ± 40			nm
		1550 ± 40			
Return Loss	PC Type	50			dB
	APC Type	65			
Operating Temperature		-40		85	°C
Tolerance		DB≤10 dB =±0.5&DB≥10 dB =±10%			
Storage Temperature		-40		85	°C

# FC PC Attenuator Specification

## Dimension and Packing

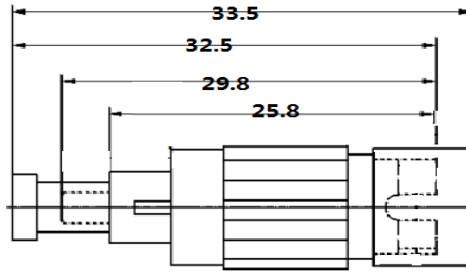

单位: 毫米 (mm)

